


Check valve Type 290



Version 0116



Type 290 Check valve has achieved the SITAC and VA approval

Application:
designed for use in cold and hot water supply systems, central and district heating plants and air.

Test:
JCH's 100% test, and 1 yearly external audit test, carried out by danish institute of technology

Material


Body:	DZR Brass CW625N
cartridge:	Watts Ocean type IN:POM
Spring:	Stainless steel
O-ring:	NBR Rubber

Check valve Type 290


Type 290 has a very low opening pressure of 100mmWC.

Working pressure: 10 bar, test pressure: 16 bar.

Max. temperature: 90° C



Version 0116

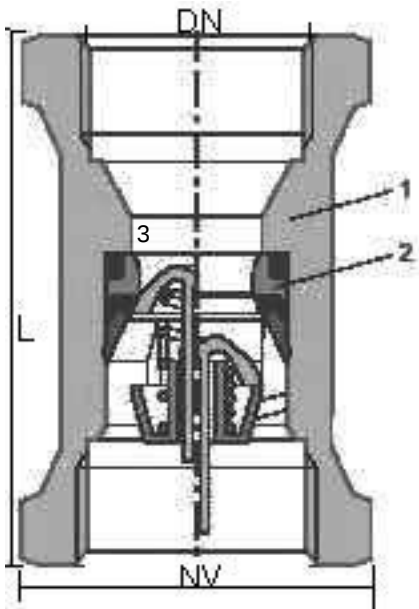

Components

- 1. Body
- 2. Cartridge
- 3. O-ring

Order no.	DN mm	RG	L mm	NV mm	ζ	material	weight Kg
430326-003	10	3/8"	40	22	14,3	CW625N	0,060
430326-004	15	1/2"	52	27	5,7	CW625N	0,120
430326-006	20	3/4"	60	33	4,4	CW625N	0,200
430326-008	25	1"	73	41	5,0	CW625N	0,300
430326-010	32	1 1/4"	90	50	6,7	CW602N	0,520
430326-011	40	1 1/2"	95	56	6,1	CW625N	0,510
430326-012	50	2"	110	68	9,9	CW625N	0,910
430326-204	15	1/2"	52	27	5,7	chromium-plated CW625N	0,125

JCH A/S

Karetmagervej 21 DK-7100 Vejle Tel. +45 75 85 84 08 Fax +45 75 85 80 82
CVR-nr. 87 56 20 18 | CVR-nr. DK 15 30 02 72