

Controllable check valve - Bronze

Type 2280

Controllable check valve with internal thread



Application:

Bronze is used together with all pipe materials and fittings. Protect against corrosion in all legal water qualities in Denmark. Installation of type 2280 preventing backflow, for medium category 2 according to EN 1717. Compact construction with easily accessible check valve plug, leads to a quick installation whether the backflow preventer is required in new or existing water installations. Available in sizes 1/2" to 2"

Product Description:

Body machined in CC499K.
Plug machined in CC499K.
Materials are approved according to 4MS UBA list 8th Revision 01.12.2017.
Check valve cartridge.

Certificates/Test:

GDV approved, cert. 03/00122.
Tested according to NKB 9 and EN/DS 13959.
100 % quality check of each valve.
Yearly audit test, carried out by The Danish Institute of Technology.



 61 Inspected by DTI


Technical data

Low opening pressure.
Max temperature 90° C
Working pressure 10 bar (tested at 16 bar).

Controllable check valve - Bronze

Type 2280

Controllable check valve with internal thread

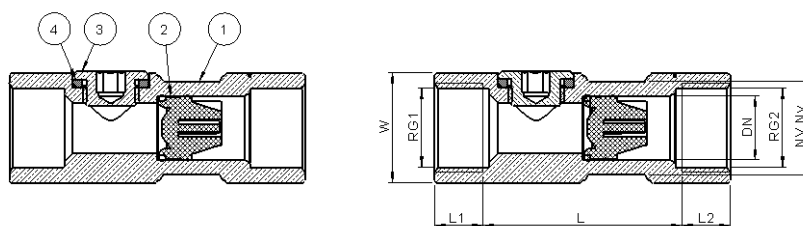

Component	Material	Component	Material
1. Body	CC499K	2. Check valve cartridge	POM
3. Plug	CC499K	4. Gasket	PTFE

Purchase no.	LN no.	DN	RG1 "	RG2 "	L mm	L1 mm	L2 mm	NV mm	W mm	Estimated weight kg
430327-804	347-015-00-08	15	½	½	47	11,5	11,5	22	26	0,2
430327-806	347-020-00-08	20	¾	¾	43	12,5	14,5	24	31,5	0,2
430327-808	347-025-00-08	25	1	1	48	16	16	30	39,5	0,4
430327-810	347-032-00-08	32	1¼	1¼	54	18	18	36	49,5	0,8
430327-811	347-040-00-08	40	1½	1½	64	18	18	46	54,4	0,9
430327-812	347-050-00-08	50	2	2	76	22	22	55	68	1,5

