


Extension nipple

Type 2297

Extension nipple with controllable check valve for water meters

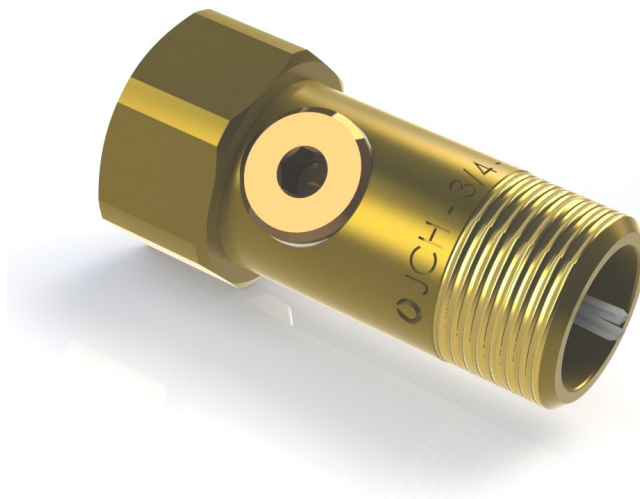

Application:

Extension nipple is used to extend water meters to fit in standard installations and furthermore to prevent backflow, according to EN1717.

The extension nipple are available in more dimensions and extends 60-90 mm.

Designed to be used in cold and hot water.

Product Description:

Body machined in CW625N (male/female).

Plug machined in CC499K. Delivered with 1 or 2 plugs.

Material are approved according to 4MS UBA list 8th Revision 01.12.2017.

Check valve cartridge.

Certificates/Test:

GDV approved, cert. 03/00108.

Tested according to NKB9 and EN/DS 13959.

100 % quality test of each valve.

Yearly audit test, carried out by Danish Technological Institute.



 61 Inspected by DTI

Technical Data

Low opening pressure.


Max temperature 90° C

Working pressure 10 bar (tested at 16 bar).

Extension nipple

Type 2297

Extension nipple with controllable check valve for water meters

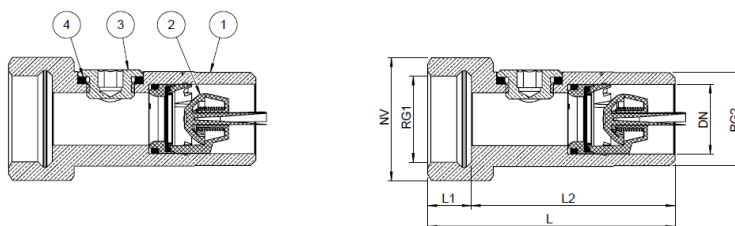

Component	Material	Component	Material
1. Body	CW625N	2. Check valve cartridge	POM
3. Plug	CC499K	4. Gasket	PTFE

Purchase no.	LNS nr.	DN mm	RG1 "	RG2 "	L mm	L1 mm	L2 mm	NV mm	Plug pcs	Estimated weight kg
484911-006	347-020-01-00	20	3/4	3/4	68	12	56	32	1	0,20
484911-008	347-025-02-00	25	1	1	68	12	56	39	1	0,33
484911-108	347-025-03-00	25	1	1	68	12	56	39	2	0,32
484911-085	347-025-04-00	25	1	1	93	12	81	39	1	0,43
484911-185	347-025-05-00	25	1	1	93	12	81	39	2	0,43
484911-090	347-025-06-00	25	1	1	98	12	86	39	1	0,45
484911-190	347-025-07-00	25	1	1	98	12	86	39	2	0,45

