

# Check valve

## Type 2190

### Check valve with internal thread



#### Application:

Designed for use in all kinds of pipe installations. Installation of type 2190 prevents backflow, for medium category 1 according to EN 1717 specification.  
Compact check valve comply with the standards for drinking water. Designed for use in both cold and hot water.  
Available in sizes 3/8" to 2"

#### Product Description:

Body made of CW625N brass.  
Materials are approved according to 4MS UBA list 8th Revision 01.12.2017.  
Check valve cartridge.

#### Certificates/Test:

GDV approved, cert. 03/00108.  
VA approved (VA: 1.55/18081)  
WRAS approved, cert. 2004316  
Tested according to NKB 9 and EN/DS 13959.  
100 % quality check of each valve.  
Yearly audit test, carried out by Danish Technological Institute.



 61 Inspected by DTI


#### Technical Data:

Low opening pressure.  
Max temperature 90° C  
Working pressure 10 bar (tested at 16 bar).

# Check valve

## Type 2190

### Check valve with internal thread

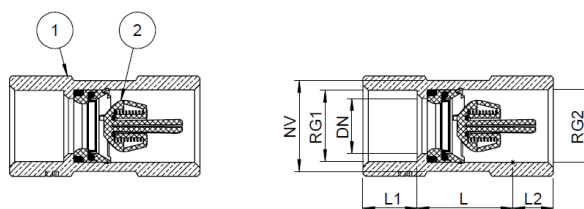

Component	Material	Component	Material
1. Body	CW625N	2. Check valve cartridge	POM

Purchase no.	LNS no.	DN mm	RG1 "	RG2 "	L mm	L1 mm	L2 mm	NV mm	Estimated weight kg
430357-003	347-010-30-00	10	3/8	3/8	23	8,5	8,5	19	0,05
430357-004	347-015-30-00	15	1/2	1/2	23	11,5	11,5	22	0,10
430357-006	347-020-30-00	20	3/4	3/4	28	13	13	24	0,14
430357-008	347-025-30-00	25	1	1	32	16	16	30	0,25
430357-010	347-032-30-00	32	1 1/4	1 1/4	38	18	18	36	0,43
430357-011	347-040-30-00	40	1 1/2	1 1/2	45	18	18	46	0,52
430357-012	347-050-30-00	50	2	2	57	22	22	55	0,94

