


JCH ball valve Type 745517

With female threads. Reduced bore
VA and SITAC approved



Version 0116



Reduced bore ball valve with female threads:

Applications:

Service valve for water supply and sewage.

Test:

JCH 100% test

Accessories:

Installation units: No.: 145221-000 and No.: 145223-000.

The installation units can be ordered in two different sizes:

900-1500mm and 1100-1900mm


Materials

Body:	DZR Brass CW625N
Pipe coupling:	DZR Brass CW625N
Spindle:	Stainless steel - AISI 303
Spindle-gasket:	SEDI PTFE + O-rings of NBR rubber
Ball:	stainless acid proof steel - AISI 316
Top gasket:	NBR O-rings
Top union:	DZR Brass CW602N
Gasket inside:	SEDI PTFE


JCH ball valve Type 745517.

With 16mm # operation key.

Service valve for water supply and sewage.

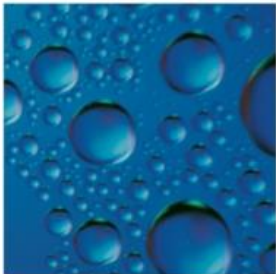

Version 0116

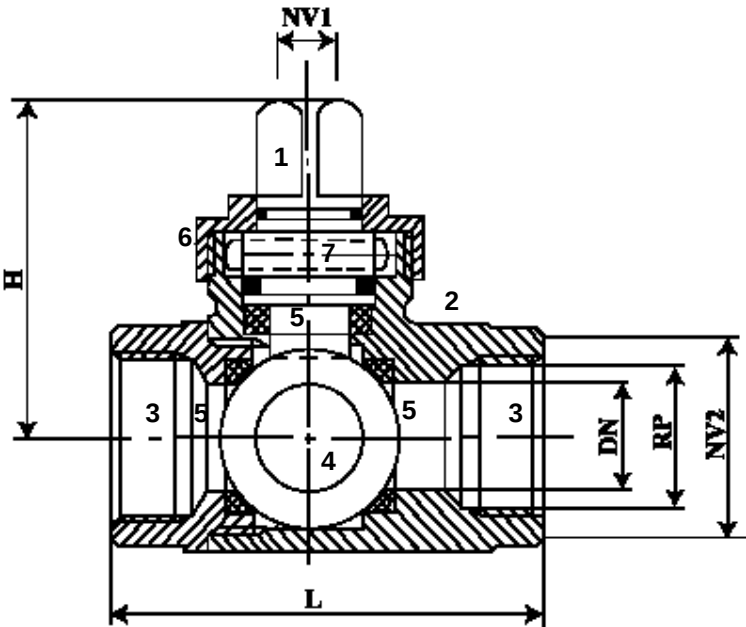

components

- 1. Spindle
- 2. Body
- 3. Connector
- 4. Ball
- 5. SEDI PTFE gaskets

- 6. Union nuts
- 7. NBR O-rings

Order no.	LNS no.	RP "	DN mm	L mm	H mm	NV1 mm	NV2 mm	weight kg
745517-006	343-015-50-00	¾"	15	65	58	16	32	0,5
745517-008	343-020-50-00	1"	20	82	61	16	39	0,7
745517-010	343-025-50-00	1¼"	25	97	66	16	42	1,1
745517-011	343-032-50-00	1½"	32	107	71	16	56	1,4
745517-012	343-040-50-00	2"	40	117	81	16	70	2,3

JCH A/S

Karetmagervej 21 DK-7100 Vejle Tel. +45 75 85 84 08 Fax +45 75 85 80 82
CVR-nr. 87 56 20 18 | CVR-nr. DK 15 30 02 72