

Check valve - bronze

Type 2180

Check valve with internal thread

**Application:**

Bronze is used together with all pipe materials and fittings. Protect against corrosion in all legal water qualities in Denmark. With installation of type 2180 the installation is backflow protected for medium category 1 according to EN 1717. Compact check valve which comply the standards within drinking water. Designed for use in both cold and hot water. Available in sizes 1/2" to 2"

Product Description:

Body machined in CC499K.
Materials are approved according to 4MS UBA list 8th Revision 01.12.2017.
Check valve cartridge.

Certificates/Test:

GDV approved, cert. 03/00122.
Tested according to NKB 9 and EN/DS 13959.
100 % quality check of each valve.
Yearly audit test, carried out by The Danish Institute of Technology.



 61 Inspected by DTI


Technical Data:

Low opening pressure.
Max temperature 90° C
Working pressure 10 bar (tested at 16 bar).

Check valve - bronze

Type 2180

Check valve with internal thread

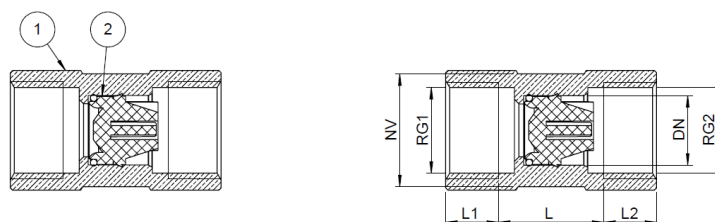

Component	Material	Component	Material
1. Body	CC499K	2. Check valve cartridge	POM

Purchase no.	LNS no.	DN mm	RG1 "	RG2 "	L mm	L1 mm	L2 mm	NV mm	Estimated weight kg
430357-804	347-015-30-08	15	½	½	23	11,5	11,5	22	0,10
430357-806	347-020-30-08	20	¾	¾	28	13	13	24	0,14
430357-808	347-025-30-08	25	1	1	32	16	16	30	0,25
430357-810	347-032-30-08	32	1¼	1¼	38	18	18	36	0,65
430357-811	347-040-30-08	40	1½	1½	45	18	18	46	0,75
430357-812	347-050-30-08	50	2	2	57	22	22	55	1,20

